

For lead-acid batteries




35 - 225 Ah



Ref. **024441**

*Fuses x 10 : ref. 054523

- Free loading surveillance by automatic switching on and off
- Protection of the electronic boards
- Allows the load of the battery without disconnecting it to avoid losing in-board parameters
- Optimum protection of the battery
- 2 modes of load : « Automatic » or « Manual »
- Indicator of load by ammeter
- Indicator of the end of the load thanks to a signal
- On / off switch with light indicator
- Short circuit, overload and polarity reversal automatic protections.

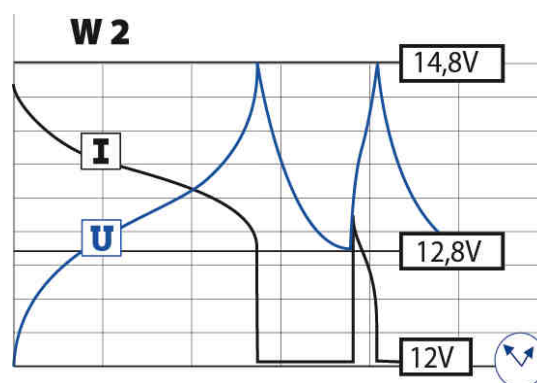

CE EN 60335-2-29

| | | | | | EFFICACE /RMS | MOYEN/AVERAGE | | | | | |
|--|------|------|--------|---|------------------|---------------|-------|-------|-----|----------------|--------|
| | | | | | | Reg 1 | Reg 2 | Reg 3 | | | |
| | 230V | 700W | 12-24V | 2 | 22A | 8A | 15A | - | 30A | 36x26x14 cm | 9,5 kg |